




3D Terminal Ends, Ring Type

Standard Type, With Insulating Sleeve,
Material : E Copper + PVC/NYLON
Surface : Tin Plated

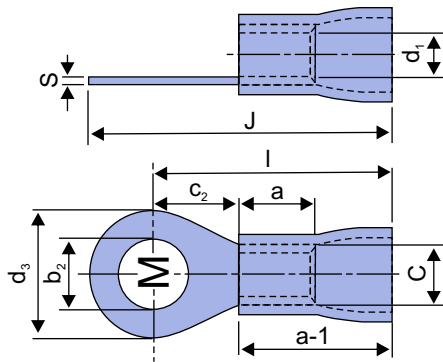

Conductor mm ²	Bolt Ø	3D CAT NO.	Dimensions in mm									Tools	pcs
			d ₁	d ₂	C	d ₃	s	a	l	C ₂	J		
1.5	M 2	3D-3076	2.2	1.6	3.2	6	0.8	5	16	4	19	3D-41	100
	M 2.5	3D-3077	2.6	1.6	3.2	6	0.8	5	16	4	19		
	M 3	3D-3078	3.2	1.6	3.2	6	0.8	5	16	4	19		
	M 3.5	3D-3079	3.7	1.6	3.2	6	0.8	5	16	4	19		
	M 4	3D-3080	4.2	1.6	3.2	6	0.8	5	16	4	19		
	M 3	3D-3081	3.2	1.6	3.2	6.8	0.8	5	14.6	3.6	18		
	M 3.5	3D-3082	3.7	1.6	3.2	6.8	0.8	5	14.6	3.8	18		
	M 4	3D-3083	4.2	1.6	3.2	6.8	0.8	5	14.6	4.6	18		
	M 3	3D-3084	3.2	1.6	3.2	8	0.8	5	17	5	21		
	M 4	3D-3085	4.2	1.6	3.2	8	0.8	5	17	5	21		
	M 5	3D-3086	5.2	1.6	3.2	8	0.8	5	17	7	21		
	M 4	3D-3087	4.2	1.6	3.2	7.2	0.8	5	16	6.5	19.5		
	M 4	3D-3088	4.2	1.6	3.2	10	0.8	5	18	6	23		
	M 5	3D-3074	5.2	1.2	2.8	10	0.8	5	18	6	23		
2.5	M 6	3D-3089	6.4	1.6	3.2	10	0.8	5	18	8	23	3D-14	100
	M 8	3D-3090	8.2	1.6	3.2	12	0.8	5	22	12	28		
	M 3	3D-3126	3.2	2.3	3.9	6.5	0.8	5	14.5	4.5	17.7		
	M 3.5	3D-3127	3.7	2.3	3.9	6.5	0.8	5	14.5	4.5	17.7		
	M 3.5	3D-3128	3.7	2.3	3.9	8	0.8	5	17	5	21		
	M 4	3D-3129	4.2	2.3	3.9	8	0.8	5	17	5	21		
	M 4	3D-3130	5.2	2.3	3.9	8	0.8	5	17	5	21		
	M 5	3D-3131	5.2	2.3	3.9	10	0.8	5	18	7	23		
	M 6	3D-3132	6.4	2.3	3.9	10	0.8	5	18	7	23		
	M 5	3D-3133	5.2	2.3	3.9	12	0.8	5	21	9	27		
	M 6	3D-3134	6.4	2.3	3.9	12	0.8	5	21	9	27		
	M 8	3D-3135	8.2	2.3	3.9	12	0.8	5	21	9	27		
	M 6	3D-3136	6.4	2.3	3.9	16	0.8	5	22	10	30		
	M 8	3D-3137	8.2	2.3	3.9	16	0.8	5	22	10	30		
6	M 10	3D-3138	10.2	2.3	3.9	16	0.8	5	22	12	30	3D-41	100
	M 10	3D-3139	10.2	2.3	3.9	18	0.8	5	25	14	34		
6	M 4	3D-3196	4.2	3.5	5.5	8	1	6	21	5	25	3D-41	100
	M 5	3D-3197	5.2	3.5	5.5	8	1	6	21	5	25		