




3D Terminal Ends, Ring Type

As Per Din 46 234

With Insulating Sleeve: PVC/NYLON

Material : E Copper

Surface : Tin Plated

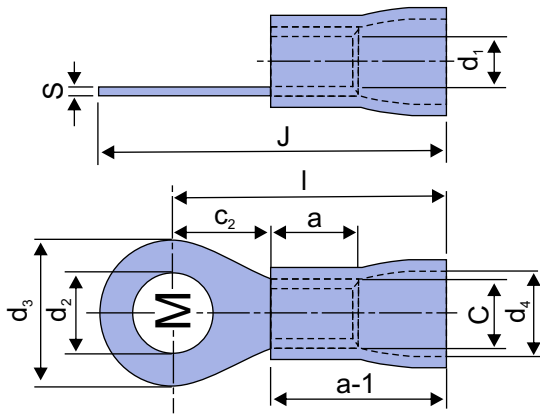

Conduc- tor mm ²	Bolt Ø	3D CAT NO.	Dimensions in mm											Tools	pcs
			d ₂	d ₁	C	d ₄	a-1	d ₃	s	a	l	C ₂	J		
0.5	M 2	3D-1145IN	2.2	1	2	3.7	11	5	0.5	4	17	6	19.5	3D-41	150
	M 2.5	3D-1146IN	2.7	1	2	3.7	11	5	0.5	4	17	6	19.5		
	M 3	3D-1147IN	3.2	1	2	3.7	11	5	0.5	4	17	6	19.5		
	M 3.5	3D-1148IN	3.7	1	2	3.7	11	6	0.5	4	19	8	22		
	M 4	3D-1149IN	4.3	1	2	3.7	11	6.5	0.5	4	19	8	22.25		
	M 5	3D-1150IN	5.3	1	2	3.7	11	8	0.5	4	19	8	23		
1.0	M 2.5	3D-1151IN	2.7	1.6	3.2	3.7	11	6	0.8	5	17	6	20	3D-41	100
	M 3	3D-1152IN	3.2	1.6	3.2	3.7	11	6	0.8	5	17	6	20		
	M 3.5	3D-1153IN	3.7	1.6	3.2	3.7	11	6	0.8	5	17	6	20		
	M 4	3D-1154IN	4.3	1.6	3.2	3.7	11	8	0.8	5	18	7	22		
	M 5	3D-1155IN	5.3	1.6	3.2	3.7	11	10	0.8	5	19	8	24		
2.5	M 3	3D-1156IN	3.2	2.3	3.9	4.4	11	6	0.8	5	17	6	20	3D-41	100
	M 4	3D-1157IN	3.7	2.3	3.9	4.4	11	6	0.8	5	17	6	20		
	M 4	3D-1158IN	4.3	2.3	3.9	4.4	11	8	0.8	5	18	7	22		
	M 5	3D-1159IN	5.3	2.3	3.9	4.4	11	10	0.8	5	20	9	25		
	M 6	3D-1160IN	6.5	2.3	3.9	4.4	11	11	0.8	5	22	11	27.5		
	M 8	3D-1161IN	8.4	2.3	3.9	4.4	11	14	0.8	5	23	12	30		
6	M 4	3D-1162IN	4.3	3.6	5.6	6.4	14	8	1	6	22	8	26	3D-41	100
	M 5	3D-1163IN	5.3	3.6	5.6	6.4	14	10	1	6	23	9	28		
	M 6	3D-1164IN	6.5	3.6	5.6	6.4	14	11	1	6	24	10	29.5		
	M 8	3D-1165IN	8.4	3.6	5.6	6.4	14	14	1	6	27	13	34		
	M 10	3D-1166IN	10.5	3.6	5.6	6.4	14	18	1	6	29	15	38		