




3D Terminal Ends, Fork Type

Standard Type, With Insulating Sleeve
 Material E-copper With PVC/NYLON Sleeve
 Surface : Tin Plated

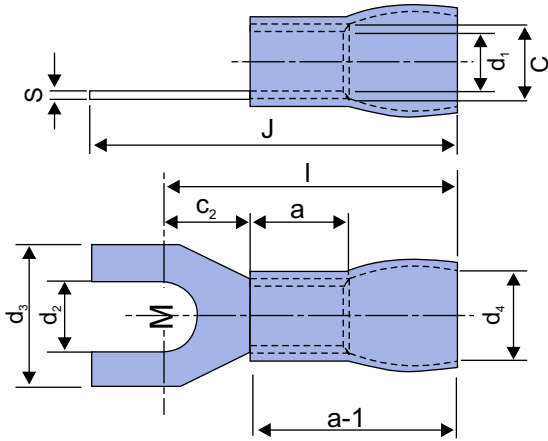

Conduc- tor mm ²	Bolt Ø	3D CAT NO.	Dimensions In mm											Tools	pcs
			d ₂	d ₁	C	d ₃	s	a	a-1	d ₄	l	C ₂	J		
1.5	M 4	3D-3647	4.1	1.6	3.2	6.5	0.8	5	11	3.7	16	4.1	20	3D-41	100
	M 5	3D-3650	5.1	1.6	3.2	8	0.8	5	11	3.7	17	7	21		
	M 3	3D-3653	3.1	1.8	3.2	5.6	0.7	5	11	3.7	15	4	19		
	M 4	3D-3654	4.1	1.8	3.2	6.8	0.7	5	11	3.7	17	18.5	20		
	M 3	3D-3640	3.1	1.6	3.2	6	0.8	5	11	3.7	16	6	19		
	M 3.5	3D-3641	3.6	1.6	3.2	6	0.8	5	11	3.7	16	6	19		
	M 4	3D-3642	4.1	1.6	3.2	8	0.8	5	11	3.7	17	7	21		
	M 5	3D-3643	5.1	1.6	3.2	10	0.8	5	11	3.7	19	8	23		
	M 2	3D-3695	2.3	1.6	3.2	4.6	0.8	5	11	3.7	15.2	5.7	18		
	M 3.5	3D-3638	5.1	1.6	3.2	8	0.8	5	11	3.7	22	3.5	26		
M 3.5	3D-3639	3.5	1.6	3.2	6.8	0.8	4	11	3.7	15	3.5	19			
2.5	M 4	3D-3663	4.1	2.3	3.9	8	0.8	5	11	4.4	17	7	21	3D-41	100
	M 5	3D-3664	5.1	2.3	3.9	10	0.8	5	11	4.4	19	9	24		
	M 6	3D-3670	6.4	2.3	3.9	10	0.8	5	11	4.4	19	9	24		
	M 4	3D-3668	4.1	2.3	3.9	6.5	0.8	5	11	4.4	16.8	4.3	20		
	M 3	3D-3671	3.1	2.4	4	5.6	0.8	5	11	4.4	15	5	19		
	M 3	3D-3661	3.1	2.3	3.9	6	0.8	5	11	4.4	16	6	19		
	M 3.5	3D-3662	3.6	2.3	3.9	6	0.8	5	11	4.4	16	6	19		
	M 3.5	3D-3657	3.5	2.3	3.9	6.5	0.8	5	11	4.4	16.8	4.3	20		
	M 5	3D-3673	5.0	2.6	4.6	10.6	1	6.2	11	4.4	20	6.2	25		
	M 4	3D-3720	4.1	3.5	5.5	8	1	6	11	4.4	21	5	25		
M 5	3D-3721	5.1	3.5	5.5	8	1	6	11	4.4	21	5	25			
6	M 3	3D-3674	3.1	3.5	5.5	6	1	6	14	6.4	21	5.5	24	3D-41	100
	M 3.5	3D-3675	3.5	3.5	5.5	6	1	6	14	6.4	21	5	24		
	M 4	3D-3679	4.1	3.6	5.6	8	1	6	14	6.4	23	8	27		
	M 6	3D-3680	6.4	3.6	5.6	11	1	6	14	6.4	25	10	30.5		
	M 5	3D-3681	5.1	3.6	5.6	10	1	6	14	6.4	24	9	29		
	M 6	3D-3683	6.5	4.5	6.9	16	1.2	6	14	6.4	27	13	35		