


3D Terminal Ends, Ring Type



Tailor Made Items, Without Insulating Sleeve
 Material : E Copper
 Surface : Tin Plated

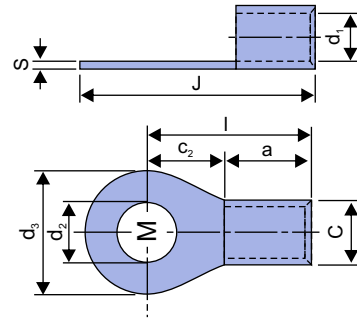

Conductor mm ²	Bolt Ø	3D CAT NO.	Dimensions in mm									Tools	pcs
			d ₂	d ₁	C	d ₃	s	a	l	C ₂	J		
FROM 0.1mm ² TO 0.5mm ²	M 4	3D-1217	4.2	0.9	1.9	6.2	0.5	4	11	7	14.1	3D-7	25
	M 4	3D-1220	4.2	0.9	1.9	8	0.5	4	12	8	16	3D-7	25
	M 4	3D-1221	4.2	1.2	2.8	8	0.8	4	12	8	16		
OVER 0.5mm ² TO 1.0mm ²	M 3	3D-1225	3.2	1.6	3.2	5.5	0.8	5	9.8	4.8	12.6		
	M 3	3D-1226	3.2	1.6	3.2	5.8	0.8	4	10.3	6.3	13.2		
	M 3.5	3D-1227	3.7	1.6	3.2	5.5	0.8	5	9.8	4.8	12.6		
	M 5	3D-1232	5	1.6	3.2	8	0.8	5	14	9	18		
	M 6	3D-1234	6.4	1.6	3.2	11.9	0.8	5	16.9	11.9	22.9		
	M 8	3D-1236	8.2	1.6	3.2	12	0.8	5	17	12	23		
	M 9	3D-1237	9.9	1.6	3.2	16	0.8	5	16	11	24		
	M 4	3D-1243	4.2	1.6	3.2	6.8	0.8	5	9.6	4.6	13		
	M 10	3D-1248	10.2	1.6	3.2	16	0.8	5	17	12	25		
	M 5	3D-1249	5.2	1.6	3.2	10	0.8	5	13	8	18		
	M 3	3D-1250	3.2	1.6	3.2	5.5	0.8	5	9.8	4.8	12.6		
	M 3.5	3D-1251	3.7	1.6	3.2	5.5	0.8	5	9.8	4.8	12.6		
	M 4	3D-1254	4.2	1.6	3.2	6.8	0.8	5	9.6	4.6	13		
	M 5	3D-1255	5.2	1.6	3.2	8	0.8	5	12	7	16		
	M 2	3D-1259	2.3	1.6	3.2	4.6	0.8	5	9.7	4.7	12		
	M 4	3D-1264	4.2	1.6	3.2	7	0.8	5	11.5	6.5	15		
	M 5	3D-1273	5.2	1.8	3.8	10	1	5	15	10	20		
	M 4	3D-1275	4.2	1.8	3.8	8	1	5	15	10	19		
	M 3	3D-1277	3.5	1.8	3.4	7	0.8	5	8.5	3.5	12		
	M 5	3D-1282	5.2	1.8	3.2	10	0.7	5	13	8	18		
FROM 1.0mm ² TO 2.5mm ²	M 5	3D-1285	5.2	1.9	3.5	10	0.8	5	13	8	18		
	M 6	3D-1286	6.4	1.9	3.5	12	0.8	5	16	11	22		
	M 4	3D-1289	4.2	2.3	3.9	8	0.8	5	12	7	16		
	M 3	3D-1294	3.2	2.3	3.9	6.5	0.8	5	9.5	4.5	12.7		
	M 8	3D-1295	8.2	2.3	3.9	12	0.8	5	16	11	22		
	M 6	3D-1299	6.4	2.3	3.9	12	0.8	5	16	11	22		
	M 3.5	3D-1300	3.7	2.3	3.9	6.5	0.8	5	9.5	4.5	12.7		
	M 10	3D-1301	10.2	2.3	3.9	16	0.8	5	17	12	25		
	M 5	3D-1302	5.2	2.3	3.9	8	0.8	5	12	7	16		
	M 8	3D-1303	8.2	2.3	3.9	12	0.8	5	16	11	22		
	M 3	3D-1312	3.2	2.3	3.9	5	0.8	5	10.5	5.5	13		
	M 3	3D-1315	3.2	2.4	4	6.4	0.8	4	9.5	5.5	12.7		
	M 4	3D-1317	4.4	2.4	4	8.7	0.8	4	12.3	8.3	16.6		