


# 3D Terminal Ends, Ring Type



**Standard Type, Without Insulating Sleeve**  
**Material : E Copper**  
**Surface : Tin Plated**

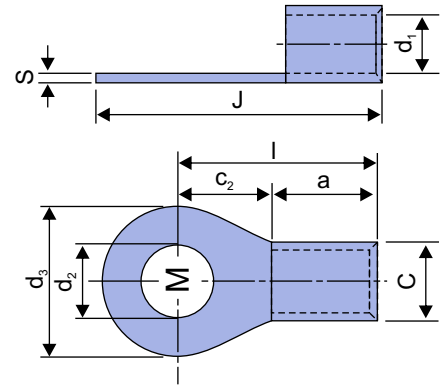

Conductor mm <sup>2</sup>	Bolt Ø	3D CAT NO.	Dimensions In mm									Tools	pcs
			d <sub>2</sub>	d <sub>1</sub>	C	d <sub>3</sub>	s	a	l	C <sub>2</sub>	J		
FROM 0.5 To 1 mm <sup>2</sup>	M 2	3D-1263	2.2	1.6	3.2	6	0.8	5	11	6	14	3D-2 3D-17	150
	M 2.5	3D-1242	2.6	1.6	3.2	6	0.8	5	11	6	14		
	M 3	3D-1247	3.2	1.6	3.2	6	0.8	5	11	6	14		
	M 3.5	3D-1269	3.7	1.6	3.2	6	0.8	5	11	6	14		
	M 4	3D-1241	4.2	1.6	3.2	6	0.8	5	11	6	14		
	M 3	3D-1260	3.2	1.6	3.2	6.8	0.8	5	9.6	4.6	13		
	M 3.5	3D-1257	3.7	1.6	3.2	6.8	0.8	5	9.6	4.6	13		
	M 4	3D-1258	4.2	1.6	3.2	6.8	0.8	5	9.6	4.6	13		
	M 3	3D-1265	3.2	1.6	3.2	8	0.8	5	12	7	16		
	M 4	3D-1246	4.2	1.6	3.2	8	0.8	5	12	7	16		
	M 5	3D-1262	5.2	1.6	3.2	8	0.8	5	12	7	16		
	M 4	3D-1261	4.2	1.6	3.2	7	0.8	5	11	6	14.5		
	M 4	3D-1266	4.2	1.6	3.2	10	0.8	5	13	8	18		
	M 5	3D-1267	5.2	1.6	3.2	10	0.8	5	13	8	18		
	M 6	3D-1224	6.4	1.6	3.2	10	0.8	5	13	8	18		
	M 6	3D-1268	6.4	1.6	3.2	12	0.8	5	12	7	18		
OVER 1 <sup>2</sup> mm TO 2.5 <sup>2</sup> mm	M 3	3D-1308	3.2	2.3	3.9	6.5	0.8	5	9.5	4.5	12.7	3D-2 3D-17	100
	M 3.5	3D-1292	3.7	2.3	3.9	6.5	0.8	5	9.5	4.5	12.7		
	M 3.5	3D-1309	3.7	2.3	3.9	8	0.8	5	12	7	16		
	M 4	3D-1296	4.2	2.3	3.9	8	0.8	5	12	7	16		
	M 5	3D-1304	5.2	2.3	3.9	8	0.8	5	12	7	16		
	M 5	3D-1310	5.2	2.3	3.9	10	0.8	5	13	8	18		
	M 6	3D-1342	6.4	2.3	3.9	10	0.8	5	13	8	18		
	M 5	3D-1313	5.2	2.3	3.9	12	0.8	5	16	11	22		
	M 6	3D-1305	6.4	2.3	3.9	12	0.8	5	16	11	22		
	M 8	3D-1307	8.2	2.3	3.9	12	0.8	5	16	11	22		
	M 6	3D-1314	6.4	2.3	3.9	16	0.8	5	17	12	25		
	M 8	3D-1311	8.2	2.3	3.9	16	0.8	5	17	12	25		
	M 10	3D-1287	10.2	2.3	3.9	16	0.8	5	17	12	25		
M 10	3D-1524	10.2	2.3	3.9	18	0.8	5	20	15	29			
M 12	3D-1438	12.7	2.3	3.9	18	0.8	5	20	15	29			