




3D Terminal Ends, Ring Type

Standard Type, Without Insulating Sleeve
Material : E Copper
Surface : Tin Plated

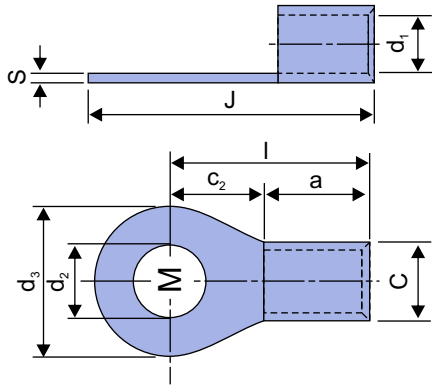

Conductor mm ²	Bolt Ø	3D CAT NO.	Dimensions in mm									Tools	pcs
			d ₂	d ₁	C	d ₃	s	a	l	C ₂	J		
OVER 2.5mm ² TO 6mm ²	M 4	3D-1432	4.2	3.5	5.5	8	1	6	13	7	17	3D-17 3D-2	100
	M 5	3D-1431	5.2	3.5	5.5	8	1	6	13	7	17		
	M 4	3D-1435	4.2	3.5	5.5	10	1	6	14	8	19		
	M 5	3D-1408	5.2	3.5	5.5	10	1	6	14	8	19		
	M 5	3D-1433	5.2	3.5	5.5	8	1	6	18.8	12.8	22.8		
	M 5	3D-1405	5.2	3.5	5.5	12	1	6	14	8	20		
	M 6	3D-1415	6.4	3.5	5.5	12	1	6	14	8	20		
	M 8	3D-1416	8.2	3.5	5.5	12	1	6	14	8	20		
	M 5	3D-1404	5.2	3.5	5.5	12	1	6	16	10	22		
	M 6	3D-1417	6.4	3.5	5.5	12	1	6	16	10	22		
	M 6	3D-1406	6.4	3.5	5.5	14	1	6	18.5	12.5	25.5		
	M 8	3D-1421	8.2	3.5	5.5	14	1	6	18.5	12.5	25.5		
	M 9	3D-1410	9.7	3.5	5.5	14	1	6	18.5	12.5	25.5		
	M 8	3D-1407	8.2	3.5	5.5	16	1	6	22	16	30		
	M 10	3D-1427	10.2	3.5	5.5	16	1	6	22	16	30		
	M 8	3D-1429	8.2	3.5	5.5	18	1	6	21	15	30		
	M 10	3D-1428	10.2	3.5	5.5	18	1	6	21	15	30		
	M 12	3D-1430	12.7	3.5	5.5	18	1	6	21	15	30		
OVER 6mm ² TO 10mm ²	M 4	3D-1463	4.2	4.3	6.3	10	1	8	17	9	22	3D-2	100
	M 5	3D-1459	5.2	4.3	6.3	10	1	8	17	9	22		
	M 4	3D-1464	4.2	4.3	6.3	10	1	8	15	7	20		
	M 5	3D-1460	5.2	4.3	6.3	10	1	8	15	7	20		
	M 6	3D-1465	6.4	4.3	6.3	12	1	8	17	9	23		
	M 8	3D-1466	8.2	4.3	6.3	16	1	8	19	11	27		
	M 8	3D-1467	8.2	4.3	6.3	18	1	8	21	13	30		
	M 10	3D-1461	10.2	4.3	6.3	18	1	8	21	13	30		
	M 10	3D-1468	10.2	4.3	6.3	22	1	8	23	15	34		
M 12	3D-1462	12.7	4.3	6.3	22	1	8	23	15	34			