




3D Terminal Ends, Ring Type

Standard Type, Without Insulating Sleeve
 Material : E Copper
 Surface : Tin Plated

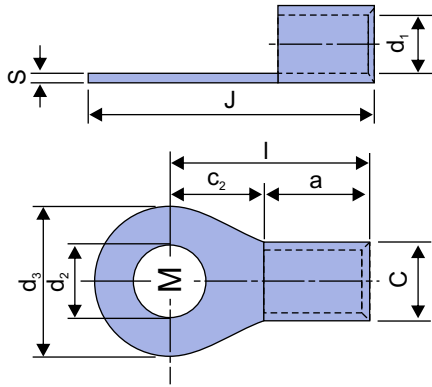

Conductor mm ²	Bolt Ø	3D CAT NO.	Dimensions in mm									Tools	pcs
			d ₂	d ₁	C	d ₃	s	a	l	C ₂	J		
OVER 35mm ² TO 50mm ²	M 8	3D-1609	8.2	10.5	14	18	1.8	16	34	18	43	3D-109	50
	M 10	3D-1607	10.2	10.5	14	18	1.8	16	34	18	43		
	M 10	3D-1610	10.2	10.5	14	22	1.8	16	32	16	43		
	M 10	3D-1611	10.2	10.5	14	24	1.8	16	36	16	48		
	M 12	3D-1608	12.7	10.5	14	24	1.8	16	36	16	48		
	M 16	3D-1612	16.2	10.5	14	32	1.8	16	38	22	54		
OVER 50mm ² TO 70mm ²	M 10	3D-1637	10.2	12	16	22	2	18	36	18	47	3D-109	25
	M 12	3D-1636	12.7	12	16	22	2	18	36	18	47		
	M 12	3D-1638	12.7	12	16	24	2	18	36	18	48		
	M 16	3D-1639	16.2	12	16	28	2	18	40	22	54		
OVER 70mm ² TO 95mm ²	M 10	3D-1651	10.2	13.5	18.1	22	2.3	20	35	15	46	3D-109	25
	M 10	3D-1652	10.2	13.5	18.1	24	2.3	18	38	20	50		
	M 12	3D-1650	12.7	13.5	18.1	24	2.3	20	38	18	50		
	M 16	3D-1653	16.2	13.5	18.1	28	2.3	20	44	24	58		
OVER 95mm ² TO 120mm ²	M 12	3D-1658	12.7	15	20.2	26	2.6	22	39	17	52	3D-109	25
	M 16	3D-1659	16.2	15	20.2	32	2.6	22	46	17	64		
	M 20	3D-1660	20.3	15	20.2	40	2.6	22	52	30	72		
OVER 120mm ² TO 150mm ²	M 12	3D-1668	12.7	16.5	23.7	34	3.6	24	49	25	66	3D-109	25
	M 16	3D-1666	16.2	16.5	23.7	34	3.6	24	49	25	66		
	M 16	3D-1669	16.2	16.5	23.7	40	3.6	16.5	54	37.5	74		
	M 20	3D-1667	20.3	16.5	23.7	40	3.6	24	54	30	74		