


# 3D Tubular Cable Lugs



**Economy-easy Entry Barrel, With Inspection Vent.**  
**For Copper Conductor**  
**Material : E Copper,**  
**Surface : Tin Plated.**

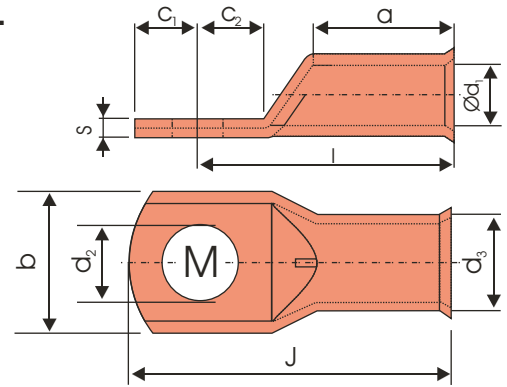

Conductor mm <sup>2</sup>	Bolt Ø	3D CAT NO.	Dimensions in mm										Tools	pcs
			a	b	c <sub>1</sub>	c <sub>2</sub>	d <sub>1</sub>	d <sub>2</sub>	d <sub>3</sub>	l	J	S		
1.5	M 3	3D-2264	6	7	4	5	1.8	3.2	3.7	14	18	1.2	3D-17 3D-2	100
	M 4	3D-2265	6	8	4	5	1.8	4.2	3.7	14	18	1.0		
	M 5	3D-2266	6	8	4	6	1.8	5.2	3.7	15	19	1.0		
	M 6	3D-2268	6	10	5	7	1.8	6.5	3.7	16	21	0.8		
2.5	M 3	3D-2261	7	7	4	5	2.4	3.2	4	15	19	1.1	3D-17 3D-2	100
	M 4	3D-2267	7	8	4	5	2.4	4.2	4	15	19	1.0		
	M 5	3D-2262	7	8	4	6	2.4	5.2	4	16	20	1.0		
	M 6	3D-2263	7	10	5	7	2.4	6.5	4	17	22	0.8		
	M 8	3D-2269	7	12	7	8	2.4	8.5	4	19	26	0.7		
4	M 4	3D-2271	9	8	4	5	3.1	4.2	4.8	17	21	1.3	3D-17 3D-2	100
	M 5	3D-2272	9	8	4	6	3.1	5.2	4.8	18	22	1.3		
	M 6	3D-2273	9	10	5	7	3.1	6.5	4.8	19	24	1.0		
	M 8	3D-2270	9	12	7	8	3.1	8.5	4.8	21	28	0.9		
6	M 5	3D-2274E	10	8	4	5	3.8	5.2	5.5	18	22	1.5	3D-17 3D-2	100
	M 6	3D-2275E	10	8	4	6	3.8	6.2	5.5	19	23	1.2		
	M 8	3D-2276E	10	10	5	7	3.8	8.5	5.5	20	25	1.0		
	M 10	3D-2277E	10	12	7	8	3.8	10.5	5.5	22	29	0.8		
	M 12	3D-2260E	10	16	9	10	3.8	13	5.5	25	34	0.7		
10	M 5	3D-2278E	10	9	4	6	4.5	5.2	6.2	19	23	1.6	3D-2	100
	M 6	3D-2279E	10	10	5	7	4.5	6.5	6.2	20	25	1.4		
	M 8	3D-2280E	10	12	7	8	4.5	8.5	6.2	22	29	1.2		
	M 10	3D-2281E	10	16	9	10	4.5	10.5	6.2	25	34	0.9		
	M 12	3D-2282E	10	18	11	12	4.5	13	6.2	28	39	0.8		
16	M 5	3D-2283E	12	10	4	6	5.4	5.2	7.1	21	25	1.6	3D-2	50
	M 6	3D-2284E	12	10	5	7	5.4	6.5	7.1	22	27	1.6		
	M 8	3D-2285E	12	12	7	8	5.4	8.5	7.1	24	31	1.4		
	M 10	3D-2286E	12	16	9	10	5.4	10.5	7.1	27	36	1.0		
	M 12	3D-2287E	12	18	11	12	5.4	13	7.1	30	41	0.9		
25	M 5	3D-2134E	12	13	7	7	7.0	5.2	8.8	23	30	1.8	3D-7-39	50
	M 6	3D-2288E	12	13	7	7	7.0	6.5	8.8	23	30	1.8		
	M 8	3D-2289E	12	13	7	9	7.0	8.5	8.8	25	32	1.8		
	M 10	3D-2290E	12	16	9	11	7.0	10.5	8.8	28	37	1.4		
	M 12	3D-2291E	12	18	11	12	7.0	13	8.8	30	41	1.2		